

Smart Drive
Solutions



DESCH GC

Gear Coupling



GC 14 - GB

POWER TRANSMISSION

DESCH Gear Couplings GC

Gear Couplings GC

DESCH gear couplings GC are flexible shaft connections suitable for a positive torque transmission. They ensure to compensate radial, axial and angular shaft misalignments. The gear coupling is made of steel with grease lubrication and O-ring seal.

DESCH gear couplings GC are used in all areas of mechanical engineering and offers a long service life with maximum reliability, resulting from the optimal grease lubrication of the crowned spline. The couplings are generally suitable for a horizontal assembly. Special types are suitable for vertical assembly, too.


The range of gear couplings includes sizes from 50 to 1000 with torque transmissions from 1.920 Nm to 8.000.000 Nm, these are suitable for shaft diameters from 20 mm to 1.000 mm.

Special types, adapted to your application requirements, are possible in a short delivery time!



Type GC

- > Standard coupling
- > Special types are possible in short delivery times

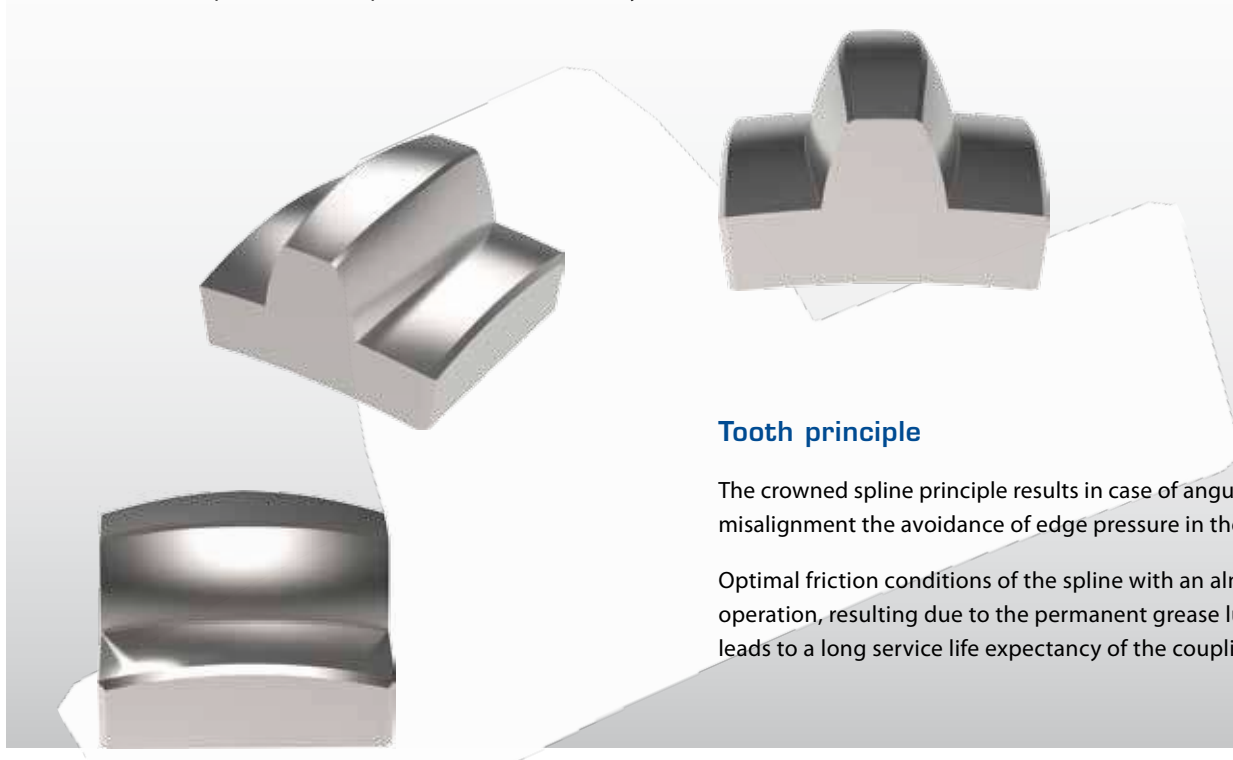

Tooth principle

The crowned spline principle results in case of angular and radial misalignment the avoidance of edge pressure in the spline.

Optimal friction conditions of the spline with an almost wear-free operation, resulting due to the permanent grease lubrication, leads to a long service life expectancy of the coupling.


DESCH Gear Couplings GC - Types

	<p>GC - Standard coupling - Small Sizes GC 50 - GC 220</p>		<p>GCL - with extended hubs</p>
	<p>GC - Standard coupling - Large Sizes GC 240 - GC 600</p>		<p>GCT - with shear pins</p>
	<p>GCY - with one-piece sleeve</p>		<p>GCB with brake disc</p>
	<p>GCLE - with intermediate shaft</p>		<p>GCV - for vertical drives</p>
	<p>GCX - with spacer sleeve</p>		<p>GCTAM - Special type for winder</p>




Further types available on request!

DESCH Gear Couplings GC

Size 50 - 220

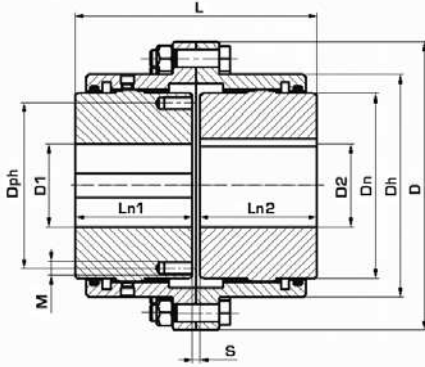

Size 240 - 600

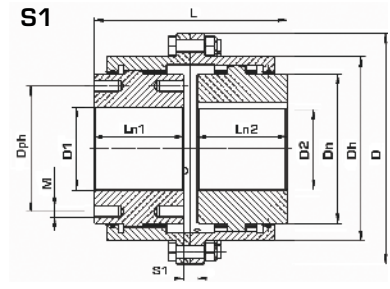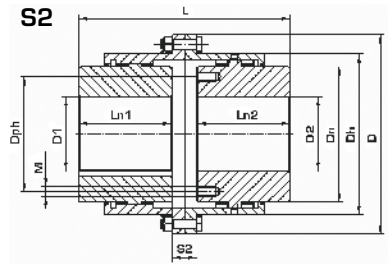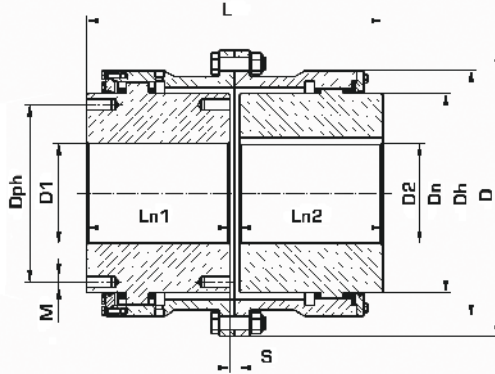


Size	D	D _{max}	D _h	D _n	D1/D2 min	D1/D2 max	L _{min}	L	L _{max}	L _{n min}	L _{n 1} /L _{n 2}	L _{n max}	S	S1	S2	D _{ph}	M
	mm		mm	mm	mm		mm			mm			mm	mm	mm	mm	mm
50	111	250	83	64	20	50	91	93	208	43	45	100	3	8	10	57	M5
65	148	250	105	83	20	65	131	136	316	50	65	150	6	20	26	72	M8
75	169	250	126	100	20	75	151	156	316	62	75	150	6	18	23	88	M8
100	209	300	162	135	30	100	171	176	316	76	85	150	6	17	23	120	M10
120	233	300	186	160	40	120	211	216	416	90	105	200	6	24	34	144	M10
135	254	300	204	175	40	135	231	236	418	100	115	200	6	24	44	156	M12
150	308	400	246	200	50	150	241	246	618	105	120	300	6	27	44	168	M16
165	336	500	262	220	60	165	301	310	628	120	150	300	10	58	83	196	M16
190	366	500	303	255	80	190	341	350	828	150	170	400	10	47	83	228	M20
220	428	600	345	290	80	220	401	410	828	175	200	400	10	50	94	246	M20
240	458	600	394	320	80	240	463	476	844	190	230	400	16	99	170	284	M20
270	490	600	436	360	120	270	503	516	844	220	250	400	16	94	162	314	M24
285	534	800	474	380	120	285	563	576	844	250	280	400	16	121	213	330	M24
330	580	800	518	431	160	330	603	616	844	280	300	400	16	101	173	390	M30
365	668	800	586	480	180	365	705	730	858	325	350	400	30	137	233	422	M30
400	730	1.000	642	530	200	400	805	830	358	345	400	450	30	131	213	478	M30
450	830	1.000	720	621	200	450	805	830	358	400	400	450	30	131	213	560	M30
500	882	1.000	742	651	200	500	905	930	1.058	410	450	500	30	141	230	600	M30
600	970	1.000	867	761	300	600	1.005	1.030	1.070	470	500	500	30	151	230	680	M30
700	1.220	2.000	1.064	921	300	700	1.405	1.440	1.710	580	700	800	40	-	-	830	M42
800	1.440	2.000	1.240	1.061	300	800	1.405	1.440	1.710	600	700	800	40	-	-	920	M48
900	1.600	2.000	1.416	1.190	400	900	1.505	1.540	1.710	680	750	800	40	-	-	1.100	M48
1000	1.814	2.000	1.630	1.350	500	1.000	1.660	1.700	2.380	740	800	1.100	100	-	-	1.160	M48

> The diameters D_n and D_h are locked. Other dimensions can be chosen according to the range given.

Technical Data


Size	Torque Nm		Max. speed min ⁻¹	Weight ¹⁾ kg	Moments of inertia ¹⁾ J kgm ²	Max. shaft misalignment ²⁾		S _{min}	S _{max}	S1 _{min}	S1 _{max}	S2 _{min}	S2 _{max}
	Nominal T _{KN}	Max T _{kmax}				radial ΔK _r mm	angular ΔK _w Grad	mm		mm		mm	
50	1.920	3.840	8.700	3,60	0,005	0,45	1	1	8	5	10	7	12
65	3.550	7.100	6.700	8,70	0,022	0,69	1	1	16	15	24	20	32
75	6.100	12.200	5.200	13	0,044	0,76	1	1	16	13	22	18	28
100	13.600	27.200	4.200	25	0,139	0,84	1	1	16	12	21	18	28
120	18.900	37.800	3.600	37	0,270	1,10	1	1	16	17	31	24	44
135	25.300	50.600	3.250	47	0,380	1,23	1	1	18	15	33	24	64
150	35.500	71.000	2.800	70	0,868	1,23	1	1	18	20	33	24	64
165	38.600	77.200	2.600	103	1,50	1,73	1	1	28	52	63	58	108
190	78.000	156.000	2.200	148	2,74	1,85	1	1	28	36	58	58	108
220	110.600	221.200	1.950	215	5,32	2,27	1	1	28	33	66	64	124
240	156.000	312.000	1.750	324	9,68	2,73	1	3	44	86	111	155	185
270	186.000	372.000	1.600	415	14,9	2,92	1	3	44	81	106	148	176
285	219.000	438.000	1.450	540	23,7	3,43	1	3	44	111	131	198	228
330	250.500	501.000	1.300	717	36,8	3,61	1	3	44	91	111	158	188
365	345.000	690.000	1.150	927	61	4,19	1	5	58	124	150	216	250
400	470.000	940.000	1.050	1.299	102	6,68	1,5	5	58	112	150	192	234
450	661.000	1.322.000	950	1.712	172	6,68	1,5	5	58	112	150	192	234
500	790.000	1.580.000	900	2.214	252	7,46	1,5	5	58	122	160	210	250
600	1.250.000	2.500.000	775	3.242	488	8,25	1,5	5	70	131	170	230	270
700	2.150.000	4.300.000	650	6.054	1.358	9,00	2	5	110	-	-	-	-
800	3.600.000	7.200.000	550	9.014	2.744	9,00	2	5	110	-	-	-	-
900	5.300.000	10.600.000	475	11.866	4.574	9,00	2	5	110	-	-	-	-
1000	8.000.000	16.000.000	425	13.500	6.691	9,00	2	60	180	-	-	-	-

- > 1) Weight and moments of inertia apply for max. bore diameter.
- 2) The values mentioned are valid for n max. = 1500 rpm




Radial misalignment is given at the maximum allowed angular misalignment and according to the short test value S, S1, S2 - table page 4.

Radial misalignment




Axial misalignment



Angular misalignment

The size of a coupling for a specific drive depends not only on the driving power and the rotational speed, also on the angular misalignment and the type of machine to be connected.

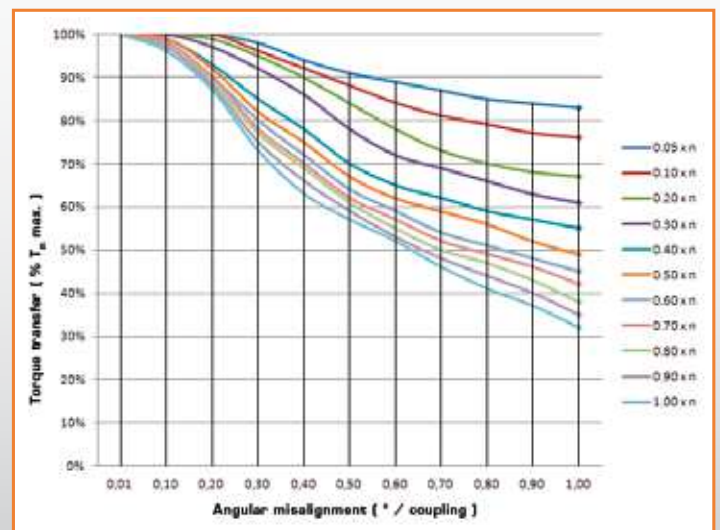

Torque transfer of the coupling in relation to increasing angular misalignment and rotational speed.

Selection

For the selection of a GC - Coupling following information are required:

- P_N Motor power respectively input power (KW)
- n Operating speed (rpm)
- L, d Length and diameter of the shafts (mm)
- S Safety factor, table page 7

Where required other geometrical or environmental restrictions.

> The torque of the machine T_{AN} is determined by:

$$T_{AN} \text{ [Nm]} = 9550 \times \frac{P_N \text{ [kW]}}{n \text{ [rpm]}}$$

This torque T_{AN} multiplied by a safety factor S depending on the application gives the required nominal coupling torque T_{KN} .

$$\text{Result: } T_{KN} \geq S \times T_{AN}$$

The coupling must be selected with a nominal torque T_{KN} higher than the calculated value.

Furthermore must be checked that the peak torque of the application is lower than the max. torque T_{KNmax} of the coupling.

Checking of the torque transfer regarding angular misalignment and rotational speed acc. to diagram page 5.

> In case that bigger shock or changing load occur we recommend a revision according to DIN 740.
An adequate calculation program is available. For such a revision the following information is required:

- | | | |
|---|--------------------|--|
| 1. Kind of the driving machine | 4. Starts per hour | 7. Moments of inertia of load- and driving sides |
| 2. Kind of the driven machine | 5. Shock loads | 8. Ambient temperature |
| 3. Power of driving and driven machines | 6. Exciting loads | |

Selection example for IEC standard motors

Given Data of the application

Driving machine:	Electric motor	$T_{AN} \text{ [Nm]} = 9.550 \times \frac{400 \text{ kW}}{500 \text{ rpm}} = 7.640 \text{ Nm}$
Power of the motor:	$P = 400 \text{ kW}$	
Speed:	$n = 500 \text{ rpm}$	$T_{KN} = 2,5 \times 7.640 \text{ Nm} = 19.100 \text{ Nm}$
Driven machine:	Rotary furnace	Selection: DESCH GC size 150
		$T_{KN} = 35.500 \text{ Nm}$



DISTRIBUIDOR EN EXCLUSIVA

RODAMIENTOS, TRANSMISIÓN Y SISTEMAS DE ENGRASE

P.E. Granland - C/ Francesc Teixidó, 10
08918 BADALONA (Barcelona) SPAIN
T. +34 93 459 06 18 FAX +34 93 457 91 99
collvilaro@collvilaro.com - www.collvilaro.com